HiluX LightSolutions

RECESSED SPOTLIGHT

2026

The right light. Every time.



HiluX recessed spotlights — Danish quality and flicker-free light, dimmable all the way down to 0 %. From ultra-flat 10 mm under-cabinet spots to robust GU10.

HIGH COLOUR RENDERING

CRI 95–97 · full spectrum

DIMS TO 0 %

Flicker-free all the way to off

5-YEAR WARRANTY

Danish quality — we stand behind it

CHOICE OF KELVIN

2700 K or 3000 K — SDCM 2

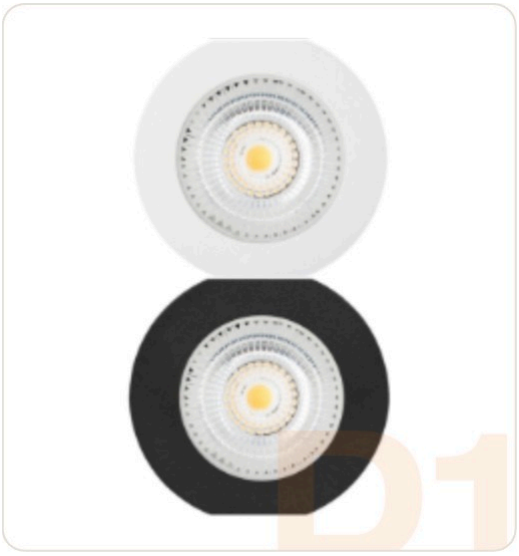

HiluX D1

12 V RECESSED SPOTLIGHT

Ultra-flat 10 mm recess. Perfect for under-cabinet use — even where you want to reuse old wiring.

CRI	97 · Full spectrum
KELVIN	2700 K / 3000 K
VOLTAGE	12 V AC/DC
INSTALLATION	10 mm · Ø 55 mm
USE	Indoor & outdoor



HiluX D3 - Tilt360

PERFECT FOR PANELLED CEILINGS

Made for panelled ceilings. 39 mm installation depth, flexible cut-out from Ø 55 – 70 mm.

CRI / LUMENS	97 · 480 lm
KELVIN	2700 K / 3000 K · SDCM 2
VOLTAGE	230 V AC
INSTALLATION	39 mm · Ø 55 – 70 mm
TILTABLE	Yes · tilt 360°
USE	Indoor & outdoor



HiluX D7

RECESSED LIGHT SOURCE

Discreet architectural light. A deeply recessed light source gives a calm look without glare.

CRI / LUMENS	95 · 420 lm
KELVIN	2700 K / 3000 K · SDCM 2
VOLTAGE	230 V AC
INSTALLATION	47 mm · Ø 68 mm
USE	Indoor & outdoor

HiluX
LightSolutions





HiluX D8 - Tilt360

IMPROVED DAISY-CHAINING

The workhorse of the range. 640 lm, easy installation with improved daisy-chaining between spots, and the same warm light as the rest of the HiluX family — indoors and out.

CRI / LUMENS	95 · 640 lm
KELVIN	2700 K / 3000 K · SDCM 2
VOLTAGE	230 V AC
INSTALLATION	39 mm · Ø 68 – 83 mm
TILTABLE	Yes · tilt 360°
USE	Indoor & outdoor
WARRANTY	5 years





HiluX D10

GU10 · 10-YEAR CORROSION WARRANTY

GU10 socket for flexible replacement — change the bulb, not the fixture. Built to last and a perfect match for HiluX GU10 bulbs in the same warm colour tone.

SOCKET	GU10
COMPATIBLE	HiluX GU10 bulbs (2700 / 3000 K)
VOLTAGE	230 V AC
INSTALLATION	62 mm · Ø 76 mm
TILTABLE	Yes · 25°
USE	Indoor & outdoor
WARRANTY	10-year corrosion warranty

MATCHES HILUX D10 **HiluX GU10 bulbs**



HiluX R8

GU10 · 2700 K

Sunflower lens, 60° wide beam, Ra ≥ 95.

360 lm · 5 W · 2700 K · Ra 95 · IP44



HiluX R10

GU10 · DIMTONE 1800–3000 K

Dimtone: warm 1800 K to neutral 3000 K.

350 lm · 5 W · 1800–3000 K · Ra 95 · IP44

One family.
The whole home.

HiluX LightSolutions

POWERED BY Shelly

● NEW · SMART DOWNLIGHT

HiluX DS8

Tilt360°



Professional recessed spotlight with built-in Shelly smart control, tunable white 2200–6000 K and top-class colour rendering (Ra ≥ 95). The only downlight you need.

POWER	KELVIN	CRI
8 W · 600 lm	**2200–6000 K**	**Ra ≥ 95**
FEATURES	RECESS	COLOUR
IP44 · Tilt 360° WiFi · BT	**H 39 mm Ø 68–83 mm**	

USE
Indoor & outdoor

WORKS WITH Google Assistant · Alexa · Home Assistant · Homey

● FULL SPECTRUM
CRI 95–97 and MacAdam ≤ 2. Colours keep their true character — from kitchen to living room.

● FLICKER-FREE
Smooth dimming all the way down to 0 % with no visible flicker or noise.

● INDOOR & OUTDOOR
Every variant can be used indoors or outdoors — IP44.

CONTACT

We respond quickly.

Danish support from HiluX experts.

LightSolutions

PHONE	+45 53 71 20 12
EMAIL	kontakt@lightsolutions.dk
WEB	Lightsolutions.dk