

Hilux D1 Gen3 LED Indbygningsspot RA97



- 5714255010039 2700K - Hvid
- 5714255010046 2700K - Sort
- 5714255010053 3000K - Hvid
- 5714255010060 3000K - Sort



ENERGY

Hilux LED ApS
D1 3000K

A
B
C
D
E
F
G

3
kWh/1000h


2019/2015

Technical data


Voltage	220-240V
Wattage	2.8W LED
Lumen	250lm @ 3000K 240lm @ 2700K
Output Current	1A
Output Voltage	12V
Beam Angle	60°
CRI	Ra≥97
IP rating	IP44
Working temperature	-20° C ...+40° C
Power Factor	PF≥0.9
Dimmable	5%-100%
IP Rating	IP44
SDCM	2
Insulation class	Class III
Lifetime (hours)	50,000

Diameter	Ø68mm
Recessed Height	10mm
Cut Out	Ø56mm


Material	Die-cast aluminum
Colour	Black/White

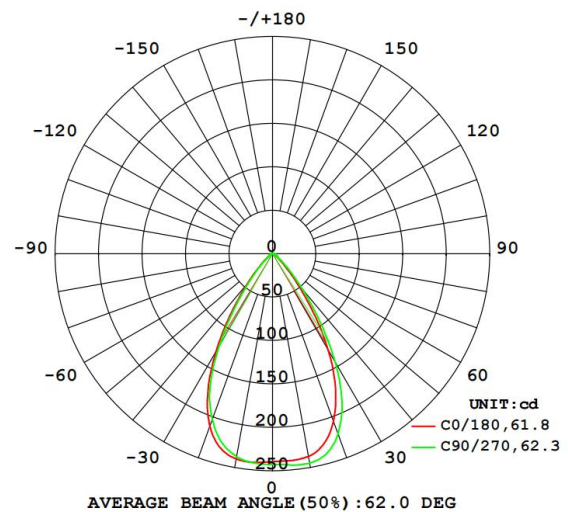

Installation

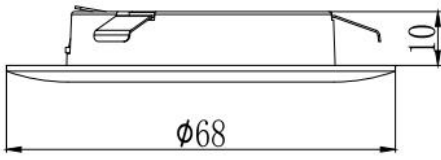


Cut-out: $\varnothing 56\text{mm}$

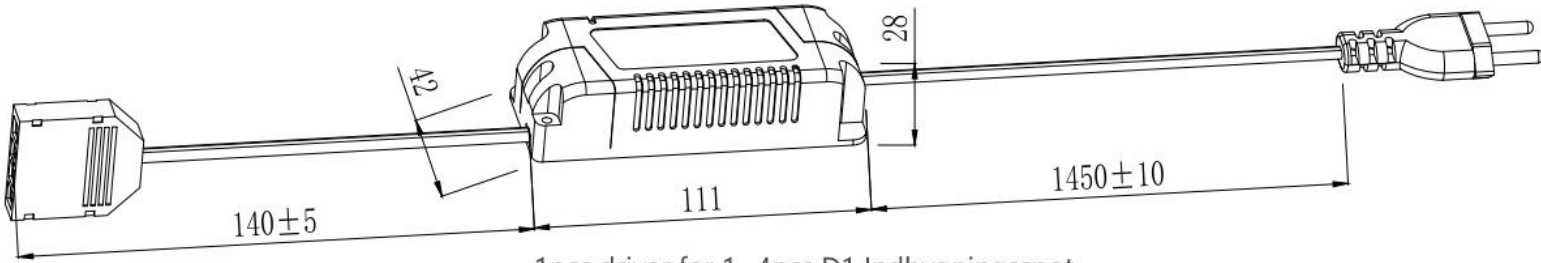

1pcs driver for 1~4pcs D1 Indbygningsspot

Distance:



Minimum distance to flammable material in the beam direction



Spectrum Distribution

Warm white 2700K

Warm white 3000K

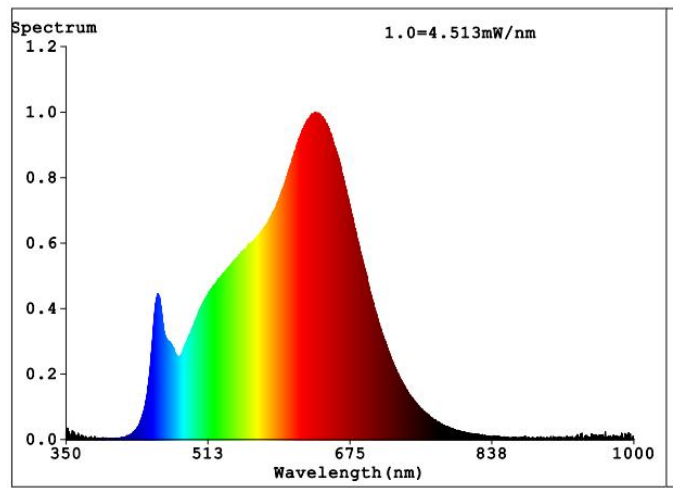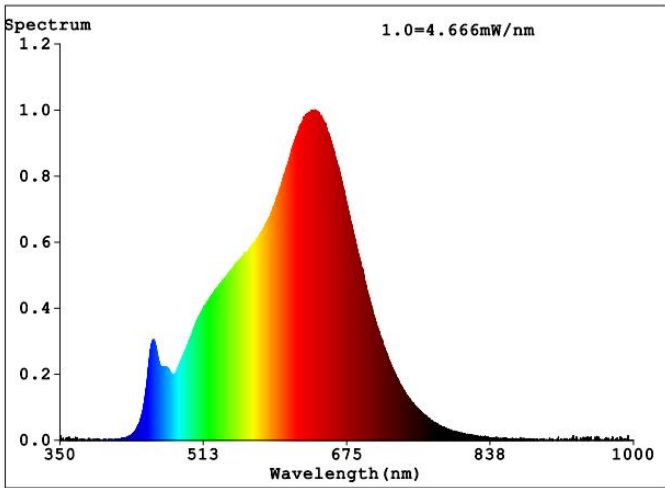

TM-30 2700K

TM-30 3000K

