

HiluX D3 Tilt 360 LED Indbygningsspot - Ra97



5714255010084 2700K - Hvid
 5714255010091 2700K - Sort
 5714255010107 3000K - Hvid
 5714255010114 3000K - Sort


Technical data

Voltage	220-240V
Wattage	6W LED
Lumen	480lm @ 3000K 450lm @ 2700K
Output Current	140mA
Output Voltage	36V
Beam Angle	40°
CRI	Ra≥97
IP rating	IP44
Working temperature	-20°C ...+40°C
Power Factor	PF≥0.9
Dimmable	5%-100%
IP Rating	IP44
SDCM	2
Insulation class	Class III
Lifetime (hours)	50,000

Diameter	Ø72mm
Recessed Height	34mm
Cut Out	Ø55mm

Material	Die-cast aluminum
Colour	Black/White





Hilux LED ApS
D3 3000K

A

B

C

D


E

F


G

← F


6
kWh/1000h



2019/2015

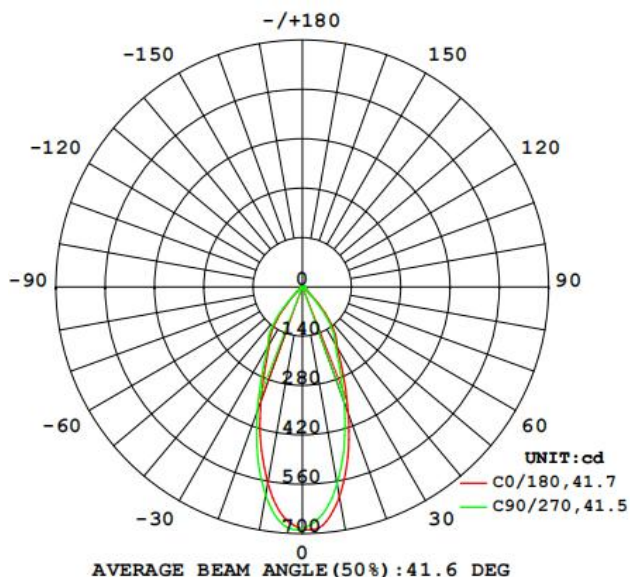


Installation

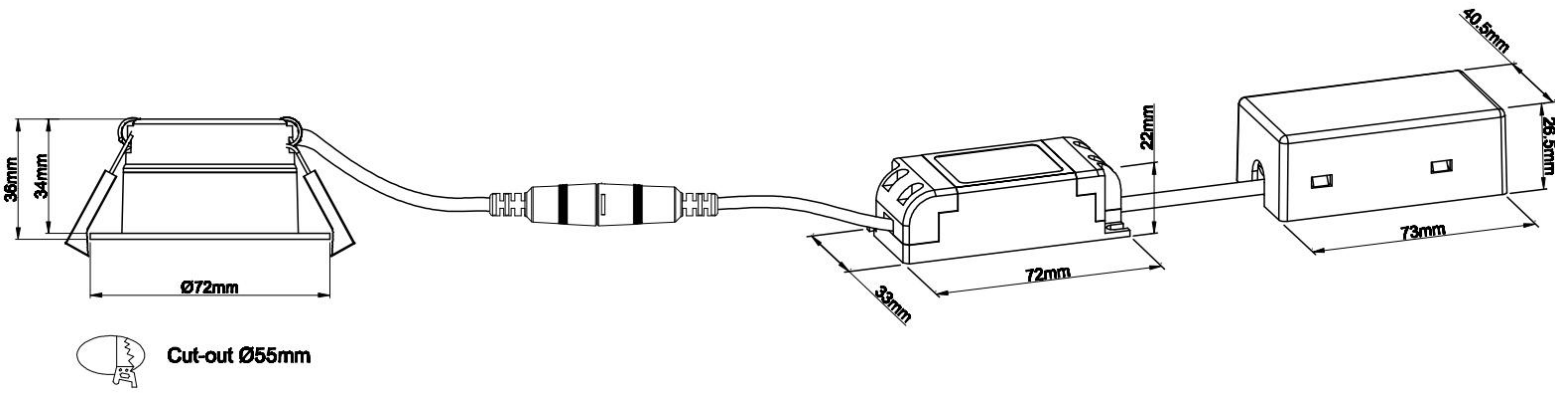


Distance:

Minimum distance to flammable material in the beam direction




Spectrum Distribution


Warm white 2700K

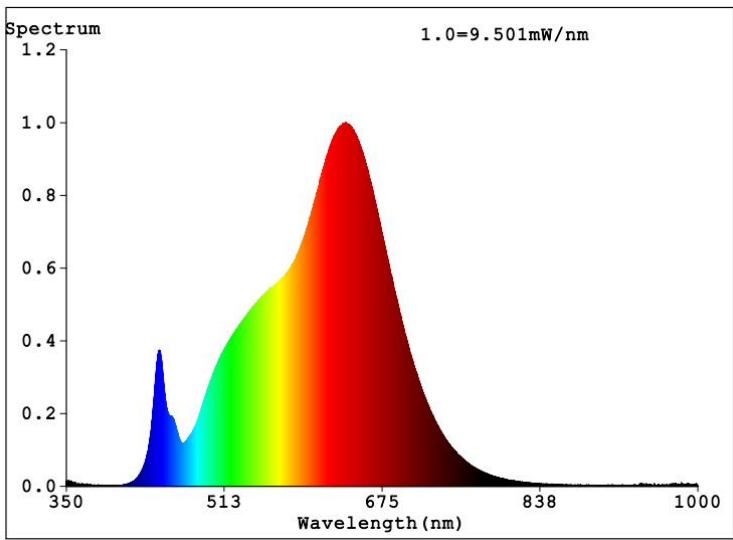

Warm white 3000K

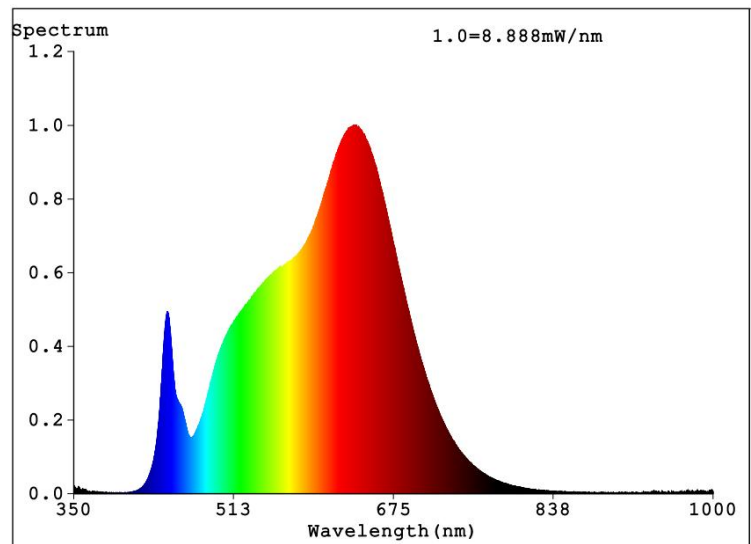

2700K TM-30 values

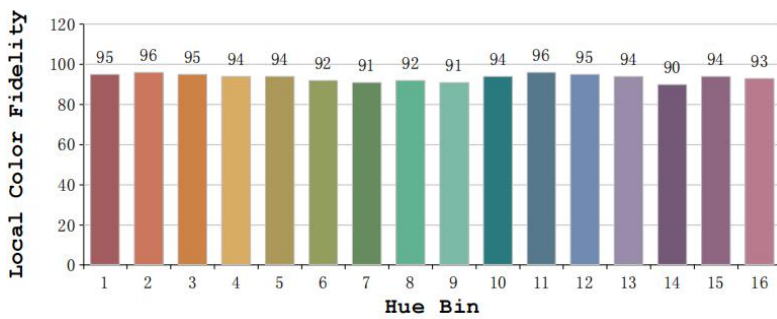

3000K TM-30 values

